



# Dualshock 2 Teardown

Written By: zachary




## Step 1 — Removing the Screws



- On the back of the controller there is screw holes
- Using a Philip Screw driver remove the screws




## Step 2 — Separating the controller pieces

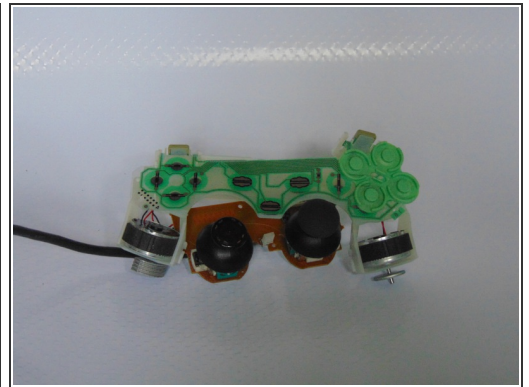

- Using a pry tool separate the two controller pieces





### Step 3 — All the buttons

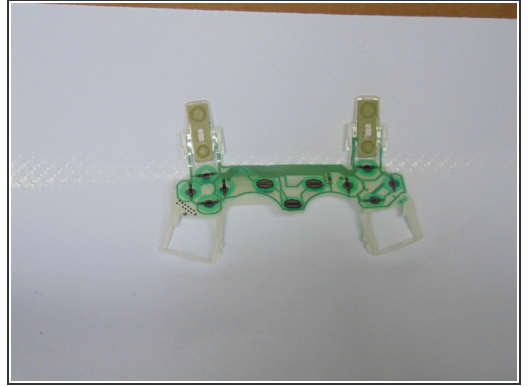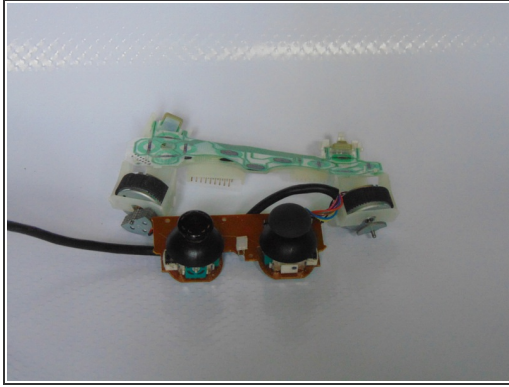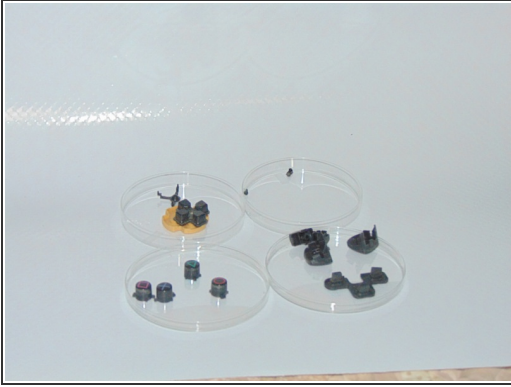


- First remove the buttons
- Most of my buttons fell off. Then left up on the sensor and set it aside.

### Step 4 — DualShock support

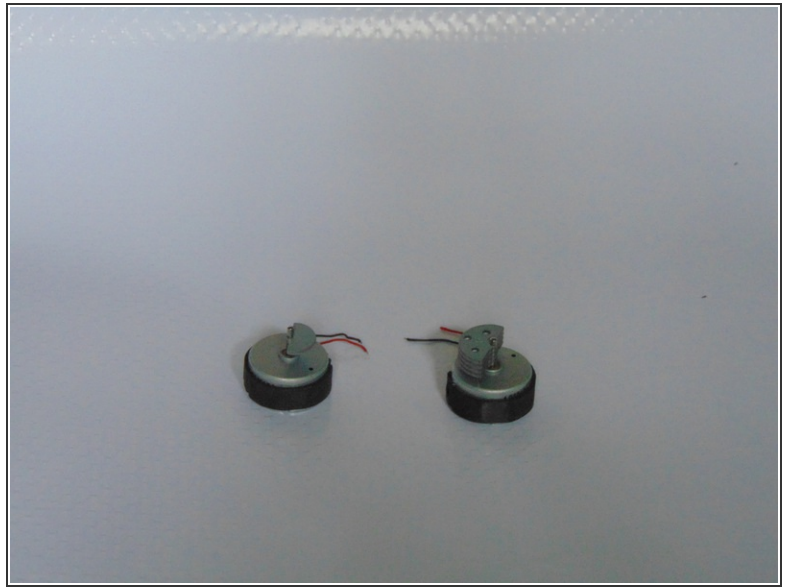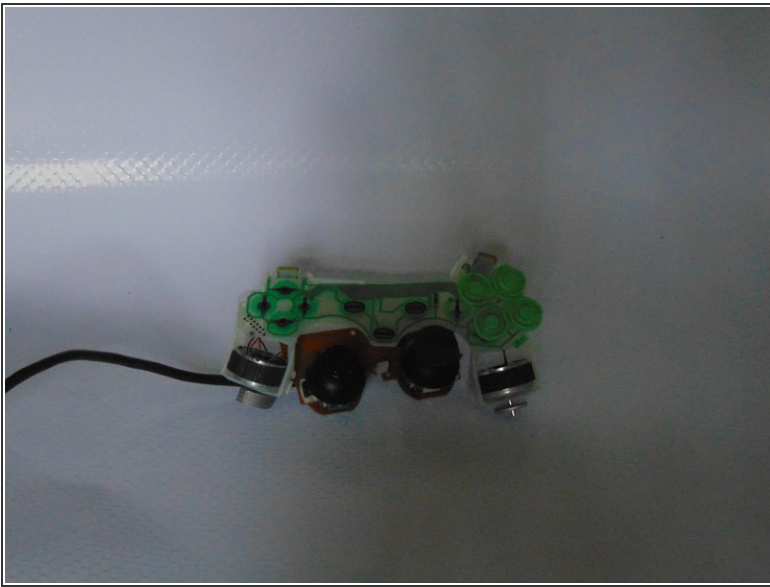

- When I lifted the controller out of the chassis one of the dual shock motors fell off its soldering. I removed the other one.

## Step 5

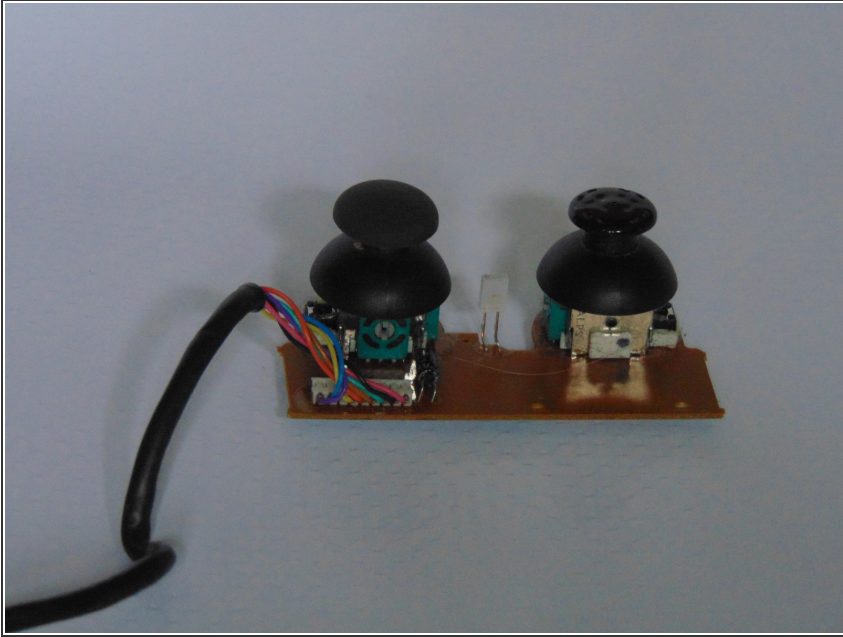

- What you are left with

---

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-10 03:56:36 AM.